



AM/FM/WB/CD/RBDS/USB/App Ready/SiriusXM Ready/iPod® & iPhone® Ready/Bluetooth

JHD36A



PRODUCT FEATURES

- 12V DC power
- Control stereo functions from your smart device with the JENSEN **jHD Control** app
- 180 watts max (45W x 4)
- Electronic AM/FM tuner (US/Euro)
- Audio streaming and controls (A2DP/AVRCP) from Bluetooth-enabled devices
- Receives phone calls (HFP) from Bluetooth-enabled phones
- SiriusXM-Ready™
- NOAA seven-channel weatherband with SAME technology
- iPod/iPhone ready via front USB
- 30 sec. Electronic Skip Protection (ESP)
- Front and rear AUX input
- Pre-amp out (RCA)
- Public Announcement (PA) ready
- Full dox matrix LCD with white LED backlighting
- Amber backlit buttons
- Non-volatile memory
- Low-battery alert (Voltage < 10.8 VDC)
- 12/24 hr selectable clock with Super-Cap, 30-day power back-up
- Conformal coated PCB
- IR remote control ready (sold separately)
- Channel lock
- RBDS

Optional Accessory (not included)



JMICHFP Omnidirectional Microphone

- 12 ft. cable with locking connector
- Visor clip and 3M adhesive pad included
- Compatible with all JENSEN Heavy Duty stereos with Bluetooth

DESIGNED TO MOVE [YOU]™



asa
ELECTRONICS™

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



AM/FM/WB/CD/RBDS/USB/APP Ready
 SiriusXM Ready/iPod® & iPhone® Ready/Bluetooth

JHD36A

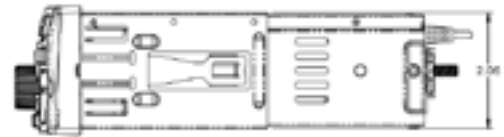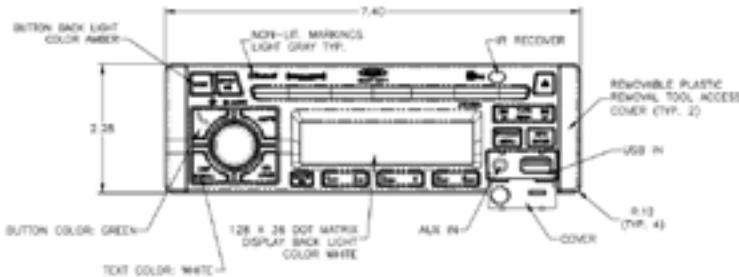

Specifications

General Specifications

Power System	12 VDC	
Operating Voltage Range	9 V to 18 V	
Current Draw @ 12V	Quiescent	0 A
	Standby	50 mA
	Maximum	10.0 A
Operating Temperature Range	-22°F to 185°F	-30°C to 85°C
Storage Temperature Range	-40°F to 185°F	-40°C to 85°C
Maximum Relative Humidity	95%	
Overall Dimensions	7.4" x 2.1" x 6.3"	
Product Weight (unpackaged)	3.50 lbs.	

Performance Specifications

FM Sensitivity	2.2 uV	
AM Sensitivity	20 uV	
CD Frequency Response	20 Hz to 20 kHz	
CD Signal to Noise	> 726 dB	
CD Skip Threshold (Random Freq. Profile)	2.0 g	
Compatible CD Formats	Audio CD, CD-R, R/W, MP3	
Output Power	RMS	23.9 W x 4
	Maximum	45 W x 4
Total Harmonic Distortion @ 1 Watt	1%	
Applied Test Suite	ASA ES0013	
Regulatory Certification	FCC Part 15B / E-Mark	